

EVOLVE YOUR
WORKFLOW
MIX™



MINIMIX - THE GO-TO LIGHT

All products are certificated CE, CSA and RoHS

MINI MIX (full-color) is the perfect lighting tools for the nomadic, quality conscience technician. Super lightweight and portable and is designed to be used anywhere and everywhere.

Reference code	MINI-HL-MX 298223000201
Light Panel Dimensions	58,5 x 20,5 x 3,7 cm 23 x 8 x 1.4"
Weight	2.56 kg 5.6 lb
Max Power Consumption	100 W
Battery Powered	Any DC source from 12 - 35 VDC
Connectors	LP-20-C07PE-01-021
Number of LEDs	288 (6 x 48)
Colour Temperature Range	1700°K to 10 000°K
CRI	CRI Average > 95
TLCI-II	TLCI Average > 90
Colored Light	Ful Color Gamut with Hue, Saturation and white base control
Gels	True Rosco Gels
Green-Magenta Adjustment	Continuously adjustable (Full Minusgreen to Full Plus-green)
Diffusion	Frosted Acrylic Diffuser
Standard Mounting	Standard Mount - The K1 single ball
Housing Material	Black Anodised Aluminium and Stainless Steel Screws
Silent Cooling	Passive Cooling Technology - No Fins, No Fans
IP Rating	20

PHOTOMETRICS

METRES	1	2	3	4	5	6
@3200°K LUX	2100	540	250	144	96	69
@5600°K LUX	2260	603	266	153	102	73

FEET	3	6	9	12	15	18
@3200°K FC	200	50	23	13	9	6
@5600°K FC	211	56	50	14	10	7



MINIMIX - THE GO-TO LIGHT

All products are certificated CE, CSA and RoHS

SL1-MINI CONTROLLER

Advanced DC driver with DMX wired and wireless function (Lumen Radio FX chip) and WiFi / Lan input Coloured control screen and Chogori input connector. Mounts directly onto the back of the light panel with spring loaded system. Suitable for MINI and SL1 MIX.

Reference code	SL1/MINI CT-MX 29822100A001
Size	21,8 x 8,5 x 6,2 cm 8.6 x 3.3 x 2.4"
Weight	0.480 kg 1 lb
Mounting	Quick lock on light and 1/4-20 Kodak female thread
Input Voltage	12~35 V
Output Voltage	12~36 V
Connectors	XLR5 female, XLR5 male, RJ45, Chogori 2 pin VDC input, Micro USB, CNLINKO LP-20, 7 pin output
Local Interface	240*400 pixels colored screen Rubber Keypad
Modes	White / Color / Gels
LED Driving Method	Constant current
Colour Temperature Range	1700 to 10000°K
Flicker Free	Tested up to 4000i/s
Remote Control	DMX in: XLR 5 male for DMX512, DMX out: XLR 5 female for DMX512, WIFI / LAN, Bluetooth (BLE), Lumen Radio Timo FX for wireless DMX
Communication protocols	DMX512 via XLR. Input and output, RDM, Art-Net via RJ45 and Wifi, Mix Communication protocol (MCP) via Bluetooth, Wireless DMX CRMX from Lumen Radio
Housing Material	PC/ABS
Upgrades	Yes, via micro USB and Bluetooth
IP Rating	20



MINIMIX - THE GO-TO LIGHT

All products are certificated CE, CSA and RoHS

POWER - EXTERNAL POWER SUPPLY FOR MINI

External and universal power supply and its mounting plate - mounts on the back of the light. Standard AC power plug and Chogori output connector

Reference code	MINI - EPS 29811205A204
Size	17 x 6 x 4 cm 6.7 x 2.4 x 1.8 "
Weight	0.9 kg 2 lb
Max power draw	100 W
Input / Output Voltage	100 to 240 VAC / 24 VDC
Housing Material	Plastic Housing and Aluminium Mounting Plate



POWER - VLOCK OR ANTON BAUER

Mounting plate which welcomes V or gold mounted batteries. Chogori output connector. Fits directly onto the back of the Light with spring loaded system or can be carried using the shoulder strap.

Reference code	SL1-MINI-VL / 29811200A105 or SL1-MINI-AB / 29811200A108
Size	140 x 85 x 27 cm 5.5 x 3.3 x 1 "
Weight	0.3 kg 0.7 lb
Housing Material	Black Anodised Aluminium and Stainless Steel Screws



SL1MIX - THE SMART LIGHT

All products are certificated CE, CSA and RoHS


At the origins of DMG, the SL1 was created to find an alternative LED solution to the fluorescent tube. The SL1 MIX (full-color) is the foot soldier, as it bring security and comfort on set.

Reference code	SL1-HL-MX 298222000401
Light Panel Dimensions	111,8 x 20,5 x 3,7 cm 44 x 8 x 1.4"
Weight	4.18 kg 9.2 lb
Max Power Consumption	200 W
Battery Powered	Any DC source from 24 - 35 VDC
Connectors	LP-20-C07PE-01-021
Number of LEDs	576 (6 x 96)
Colour Temperature Range	1700°K to 10 000°K
CRI	CRI Average > 95
TLCI-II	TLCI Average > 90
Colored Light	Ful Color Gamut with Hue, Saturation and white base control
Gels	True Rosco Gels
Green-Magenta Adjustment	Continuously adjustable (Full Minusgreen to Full Plus-green)
Diffusion	Frosted Acrylic Diffuser
Standard Mounting	Standard Mount – The K1 single ball
Housing Material	Black Anodised Aluminium and Stainless Steel Screws
Silent Cooling	Passive Cooling Technology – No Fins, No Fans
IP Rating	20

PHOTOMETRICS

METRES	1	2	3	4	5	6
@3200°K LUX	4100	1200	552	324	213	156
@5600°K LUX	4036	1152	544	319	214	156

FEET	3	6	9	12	15	18
@3200°K FC	384	112	51	30	20	15
@5600°K FC	375	107	51	30	20	15

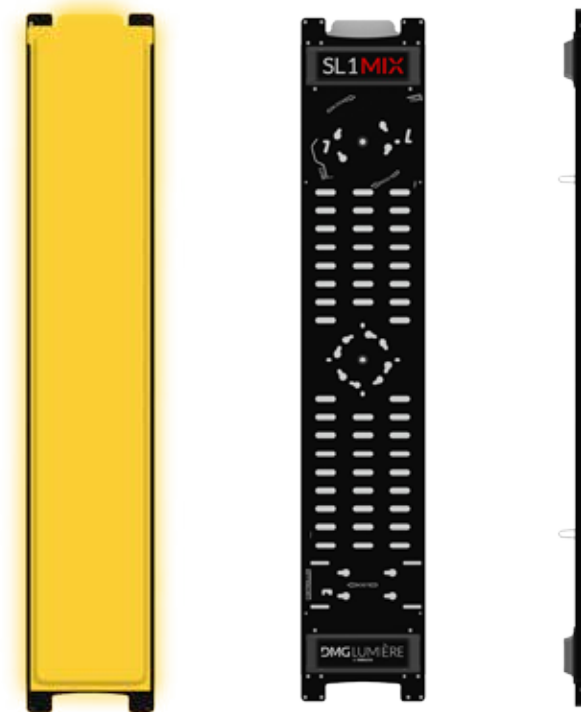

SL1MIX - THE SMART LIGHT

All products are certificated CE, CSA and RoHS

SL1-MINI CONTROLLER

Advanced DC driver with DMX wired and wireless function (Lumen Radio FX chip) and WiFi / Lan input Coloured control screen and Chogori input connector. Mounts directly onto the back of the light panel with spring loaded system. Suitable for MINI and SL1 MIX.

Reference code	SL1/MINI CT-MX 29822100A001
Size	21,8 x 8,5 x 6,2 cm 8.6 x 3.3 x 2.4"
Weight	0.480 kg 1 lb
Mounting	Quick lock on light and 1/4-20 Kodak female thread
Input Voltage	12~35 V
Output Voltage	12~36 V
Connectors	XLR5 female, XLR5 male, RJ45, Chogori 2 pin VDC input, Micro USB, CNLINKO LP-20, 7 pin output
Local Interface	240*400 pixels colored screen Rubber Keypad
Modes	White / Color / Gels
LED Driving Method	Constant current
Colour Temperature Range	1700 to 10000°K
Flicker Free	Tested up to 4000i/s
Remote Control	DMX in: XLR 5 male for DMX512, DMX out: XLR 5 female for DMX512, WIFI / LAN, Bluetooth (BLE), Lumen Radio Timo FX for wireless DMX
Communication protocols	DMX512 via XLR. Input and output, RDM, Art-Net via RJ45 and Wifi, Mix Communication protocol (MCP) via Bluetooth, Wireless DMX CRMX from Lumen Radio
Housing Material	PC/ABS
Upgrades	Yes, via micro USB and Bluetooth
IP Rating	20



SL1MIX - THE SMART LIGHT

All products are certificated CE, CSA and RoHS

POWER - EXTERNAL POWER SUPPLY FOR SL1

External and universal power supply and its mounting plate - mounts on the back of the light. Standard AC power plug and Chogori output connector

Reference code	SL1-EPS 29811201A404
Size	17 x 6 x 4 cm 6.7 x 2.4 x 18 "
Weight	0.9 kg 2 lb
Max power draw	200 W
Input / Output Voltage	100 to 240 VAC / 24 VDC
Housing Material	Plastic Housing and Aluminium Mounting Plate



POWER - VLOCK OR ANTON BAUER

Mounting plate which welcomes V or gold mounted batteries. Chogori output connector. Fits directly onto the back of the Light with spring loaded system or can be carried using the shoulder strap.

Reference code	SL1-MINI-VL / 29811200A105 or SL1-MINI-AB / 29811200A108
Size	140 x 85 x 27 cm 5.5 x 3.3 x 1 "
Weight	0.3 kg 0.7 lb
Housing Material	Black Anodised Aluminium and Stainless Steel Screws



POWER - DOUBLE V-LOCK BATTERY ADAPTOR MIX

Standard V mount dock for two batteries (maximum 17.5 VDC) providing a 26 VDC nominal output.

Reference code	BB-VLO-2X 294117070000
Size	15,5 x 9,5 x 8 cm 6.1 x 3.7 x 3.1 "
Weight	0.64 kg 1.4 lb
Housing Material	Aluminium



MAXIMIX - LIGHTWEIGHT AND POWERFUL

All products are certificated CE, CSA and RoHS

The largest and the brightest member of the MIX range of LED fixtures, the MAXI MIX is capable of producing up to 7550 Lux (@1M @5500K) – making it the perfect choice for washing your scene in bold colors, luscious tints or flattering, full-spectrum white light. MAXI MIX controller is integrated on board.

Reference code	MAXI-HL-MIX 29822400A360
Light Panel Dimensions	120 x 36 x 8,5 cm 47 x 14 x 3.3"
Weight	8 kg 17.6 lb
Max Power Consumption	360 W
Battery Powered	24 to 35 VDC - minimum battery load 15 Amp
Connectors	XLR 3 pin DC input
Number of LEDs	1080 (6x 180)
Colour Temperature Range	1700°K to 10 000°K
CRI	CRI Average > 95
TLCI-II	TLCI Average > 90
Colored Light	Ful Color Gamut with Hue, Saturation and white base control
Gels	True Rosco Gels
Green-Magenta Adjustment	Continuously adjustable (Full Minusgreen to Full Plus-green)
Diffusion	Frosted Acrylic Diffuser
Standard Mounting	Yoke with 16mm female /28mm male hybrid spigot. Imperial: baby pin receiver, junior pin male
Housing Material	Black Anodised Aluminium and Stainless Steel Screws
Silent Cooling	Passive Cooling Technology – No Fins, No Fans
IP Rating	20

Local Interface	240*400 pixels colored screen Rubber Keypad
Modes	White / Color / Gels
LED Driving Method	Constant current
Colour Temperature Range	1700°K to 10000°K
Flicker Free	Tested up to 4000i/s
Remote Control	DMX in: XLR 5 male for DMX512, DMX out: XLR 5 female for DMX512, WIFI / LAN, Bluetooth (BLE), Lumen Radio Timo FX for wireless DMX
Communication protocols	DMX512 via XLR. Input and output, RDM, Art-Net via RJ45 and Wifi, Mix Communication protocol (MCP) via Bluetooth, Wireless DMX CRMX from Lumen Radio
Upgrades	Yes, via micro USB and Bluetooth



PHOTOMETRICS

METRES	1	2	3	4	5	6
@3200°K LUX	7377	2249	1034	609	419	306
@5600°K LUX	7550	2279	1045	621	428	311

FEET	3	6	9	12	15	18
@3200°K FC	811	250	114	69	46	35
@5600°K FC	821	256	117	70	47	34



MAXIMIX - LIGHTWEIGHT AND POWERFUL

All products are certificated CE, CSA and RoHS

MAXI MIX POWER SUPPLY UNIT

External power supply in its shell - mounts on the back of the light with Velcro straps. An additional fastening plate allows completely secured mounting with screws. Handle and standard 3/8-16 thread for independent hanging.

Neutrik PowerCon True 1 in and through AC power plug allows for AC daisy chain.

Reference code	MAXI-PSU-MIX 29822400A401
Size	35 x 5,3 x 9 cm 13.7 x 2 x 3.5 "
Weight	1.8 kg 4 lb
Max power draw	400 W
Input / Output Voltage	100 to 240 VAC / 24 VDC
Connector	Neutrik PowerCon True 1 in and through
Housing Material	Aluminum housing



MAXI MIX LINK 2

Rigging accessory mounting on the back of the light with strong 1/4 turn fasteners, allowing to join the lamphead together. Side threads allow for mounting on the double yoke accessory. An arch with 10mm hole allow for standard collars and hooks mounting on tubes and structures The LINK 2 is to be used on the sides of the assemblies.

Reference code	MAXI-LINK2-MIX
Size	21.5 x 12.3 x 6.3 cm 8.5 x 4.8 x 2.5 "
Weight	0.5 kg 1.1 lb
Material	Treated steel



MAXI MIX LINK 4

Rigging accessory mounting on the back of the light with strong 1/4 turn fasteners, allowing to join the lamphead together.

An arch with 10mm hole allow for standard collars and hooks mounting on tubes and structures The LINK 4 is to be used between 4 lampheads.

Reference code	MAXI-LINK4-MIX
Size	21.5 x 21.5 x 4.2 cm 8.5 x 8.5 x 1.6 "
Weight	0.6 kg 1.3 lb
Material	Treated steel



DIFFUSION

All products are certificated CE, CSA and RoHS

DIFFUSION – BARN DOORS

Barn doors are light modifiers to shape and direct light. Quick fit function with 2 spring loaded screws which fit directly on to the side of the light.

	MINI	SL1
Reference code	MINI-SH 29811205A206	SL1-SH 29811201A405
Size	55 x 20 x 1 cm 21.6 x 7.9 x 0.4 "	108 x 20 x 1 cm 42.5 x 7.9 x 0.4 "
Weight	0.9 kg 1.9 lb	1.7 kg 3.7 lb
Colour	Black	
Material	Aluminium and Plastic	



DIFFUSION – FLAT DOME DIFFUSER

Standard thermoformed flat diffuser (included with the Light). Semi frosted acrylic diffuser – reduces visibility of LED pixels.

	MINI	SL1	MAXI
Reference code	MINI-DIFF-FD 29822300A202	SL1-DIFF-FD 29822200A402	MAXI-DIFF-FD
Size	50 x 19,5 x 0,2 cm 19.7 x 7.6 x 0.1 "	107 x 20 x 7 cm 42 x 7.8 x 0.1 "	118,3 x 33,5 x 1,7 cm 46.6 x 13.2 x 0.7 "
Weight	0.28 kg 0.6 lb	0.66 kg 1.4 lb	1.2 kg 2.6 lb
Colour	White		
Adaptor	PC/ABS & BRASS		
Diff's	PMMA		
Material	Acrylic		



DIFFUSION – THE DOME – BEST SELLING DIFFUSION

Round soft diffuser. Press Safety Catch, remove Standard Flat Diffusion and slide on to replace.

	MINI	SL1
Reference code	MINI-DIFF-TF 29811205A207	SL1-DIFF-TF 29811201A406
Size	55 x 20 x 7 cm 21 x 8 x 2.5 "	107 x 20 x 7 cm 42 x 8 x 2.5 "
Weight	0.4 kg 0.9 lb	1 kg 2.2 lb
Colour	White	
Material	Acrylic – 3 mm Thermoformed	



CABLES

All products are certificated CE, CSA and RoHS

MINI / SL1 MIX-C2

Links the SL1/MINI MIX controller to the MINI or SL1 MIX Light. Max distance 16m (48') without power loss.

Reference code	SL1/MINI C2-MX 29822100A002
Length	2 m / 7.8'
Weight	0.2 kg / 0.44 lb
Sleeving Material	PVC



MINI / SL1 MIX-C8

Links the SL1/MINI MIX controller to the MINI or SL1 MIX Light. Max distance 16m (48') without power loss.

Reference code	SL1/MINI C8-MX 29822100A003
Length	8 m / 25'
Weight	0.7 kg / 1.5 lb
Sleeving Material	PVC



MAXI-AC-CABLE-MIX

AC cable for MAXI MIX Power supply unit. Standard Euro/US/UK plug to Neutrik Powercon True1 NAC3FX.

Reference code	MAXI-AC-CABLE-MX 29822400A404
Length	1,5 m / 6'
Weight	0.3 kg / 0.7 lb
Sleeving Material	PVC



MAXI-DC-CABLE-MIX

Links MAXI MIX Power supply unit to the MAXI MIX Light. Neutrik XLR 3 pins male and female.

Reference code	MAXI-DC-CABLE-MIX 29822400A403
Length	2 m / 7.8'
Weight	0.3 kg / 0.7 lb
Sleeving Material	PVC

CABLE XLR4-CHOGORI 2M FOR DOUBLE V-LOCK MIX

Links the Double V-Lock MIX to the SL1/MINI MIX controller.

Reference code	C2-XLR4-CHO 29811200A114
Length	2 m / 7.8'
Weight	0.18 kg / 0.4 lb
Sleeving Material	PVC

BAGS

All products are certificated CE, CSA and RoHS

MINI RIGID BAG

Rigid Bag with Wheels and extendable handle. The Rigid Bag can contain one fully accessorised MINI SWITCH Kit (DMX or DC/DC) including DoP Choice items and The Dome. Soft partitioning walls inside the bag to add extra protection.

Reference code	MINI-RB 29811205A211
Size	73x30x35cm 28.7x5.7x13.8"
Weight	5.5 kg 12.1 lb
Rigid Bag Colour	Black with White Stitching of DMG Lumière Logo
Material	Hard Wearing Nylon



SL1 RIGID BAG

Rigid Bag with Wheels and Shoulder Strap. The Rigid Bag can contain one fully accessorised SL1 SWITCH Kit (DMX or DC/DC) including DoP Choice items and The Dome. Soft partitioning walls inside the bag to add extra protection.

Reference code	SL1-RB 29811201A409
Size	125 x 30 x 20 cm 49.2 x 11.8 x 8.6"
Weight	6 kg 13.2 lb
Rigid Bag Colour	Black with White Stitching of Lumière Logo
Material	Hard Wearing Nylon



MAXI SLIP COVER

MAXI Slip Cover. Fits the MAXI Light with Yoke and a shoulder strap. Power Options, cables and accessories can fit in the MINI Rigid Bag.

Reference code	MAXI-HL-SW-SB 29811210A409
Size	148x50x11.5cm 58x19.7x4.5"
Weight	2.15 kg 4.7 lb
Colour	Black with White Stitching of Lumière Logo
Material	Hard Wearing PVC



MAXI MIX RIGID BAG

MAXI MIX Rigid Bag. Fits the MAXI Light with Yoke, Power Options, cables and accessories.

Reference code	MAXI-RB 29811210A417
Size	163.8 x 56.5 x 26.6 cm 64.5 x 22.3 x 10.5"
Weight	14.9 kg 33 lb
Colour	Black with White Stitching of Lumière Logo
Material	Molded polyethylene

MOUNTS

All products are certificated CE, CSA and RoHS

STANDARD MOUNT FOR MINI / SL1 AND MAXI

Standard 10mm "lollipop" male mount with 360° single ball action – universal mounting plate



Reference code	SL1-FX-K1 29811200A102
Maximum Weight Load	15 kg / 33 lb
Size	14x8x8 cm 5.5x3.1x3.1"
Weight	0.74 kg 1.6 lb
Colour	Black and Silver
Material	Aluminium and stainless steel

HYBRID MOUNT FOR MINI / SL1 AND MAXI

Hybridation of the lollipop mount, compatible with 28mm and 16mm standard receivers and spigots.



Reference code	SL1-FX-K1-HYB 29811200A115
Maximum Weight Load	15 kg / 33 lb
Size	16,4x8x8 cm 6.5x3.1x3.1"
Weight	1,1kg 2,4lb
Colour	Black and Silver
Material	Aluminium and stainless steel



C-STAND MOUNT (GOOSE NECK) FOR MINI / SL1 AND MAXI

Goose neck 16mm Female Receiver with 360° single ball action – ideal for c-stand mounting.

Reference code	SL1-FX-K2 29811200A103
Maximum Weight Load	15 kg / 33 lb
Size	35x16x9 cm 13.7x6.3x3.5"
Weight	1 kg 2.2 lb
Colour	Black and Silver
Material	Aluminium and stainless steel



QUICK FIT HANDLE FOR MINI AND SL1

Quick Fit Handle Mount. Mounts on to the back of the light or Power Box with universal mounting plate - ideal for any moving situation.

Reference code	SL1-FX-2 29811200A104
Maximum Weight Load	15 kg / 33 lb
Size	15x9x6 cm 6x3.5x2.5"
Weight	0.28 kg 0.6 lb
Colour	Black with Red Handle
Material	Aluminium

MOUNTS

All products are certificated CE, CSA and RoHS

ADAPTOR PLATE

Adaptor plate for hanging SL1/MINI MIX Controller with the power supplies or battery plate


Reference code	SL1-MINI-AD-MX 29822100A004
Size	25,6 x 11,9 x 0,8 cm 10 x 4,7 x 0,3 "
Weight	0,1 kg 0,22 lb
Colour	Black
Material	PC/ABS



MAXI MIX YOKE

Yoke for MAXI MIX light, hybrid 16mm and 28mm detachable spigot.

Reference code	MAXI-SINGLE-YOKE-MX 29822400A402
Size	132,4 x 44,7 x 11,2 cm 52.1 x 17.6 x 4.4 "
Weight	4,1 kg 9 lb
Colour	Black
Material	Steel

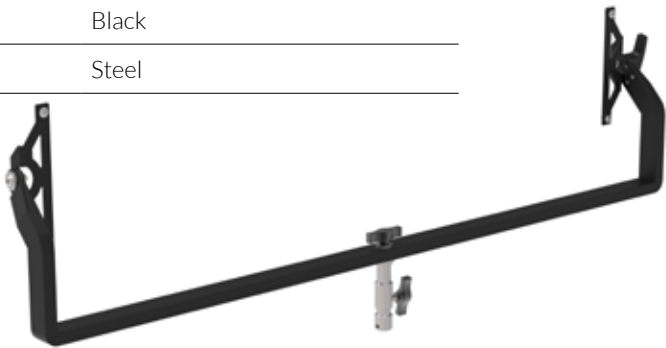

DOP CHOICE

All products are certificated CE, CSA and RoHS



Do we need to introduce these guys to you? We love their accessories so much that we've had SNAPGRIDS and SNAPBAGS made for all of our lights!

All DOP Choice items are made of black neutral fabric. Reflective inside and high quality diffusion cloth.



MINI

SL1

MAXI

		Reference	Size	Reference	Size	Reference	Size
SnapGrid	Directs the softlight at 30/50° angle (horizontal/vertical) Mounts rapidly onto the light with a clever velcro system	DOP-MINI-SG 29811205A213	58,5 x 20 x 11 cm 23 x 7.8 x 4.3 "	DOP-SL1-SG 29811201A410	113 x 20 x 11 cm 44.4 x 7.8 x 4.3 "	Coming soon	
SnapBag	Light bank which mounts directly onto the light into the designated holes – comes with a full, a half and a quarter fabric diffuser	DOP-MINI-SB 29811205A214	58,5 x 20 x 8 cm 23 x 7.8 x 3.1 "	SL1-DOP-SB 29811201A411	136 x 40 x 30 cm 53.3 x 15.7 x 11.8 "	Coming soon	
Snapgrid For SnapBag	Fits around the SnapBag with velcro, directs the soft light at 40/60° angle (horizontal/vertical)	MINI-DOP-SGSB 29811205A215	58,5 x 20 x 8 cm 23 x 7.8 x 3.1 "	SL1-DOP-SGSB 29811201A412	113 x 20 x 8 cm 44.4 x 7.8 x 3.1 "	Coming soon	



DOP CHOICE

All products are certificated CE, CSA and RoHS

SNAPBAG OCTA 3 FEET

Designed for RABBIT-EARS Frames incl. Magic Cloth Front Screen, Baffle 1/2 Grid cloth and Carry Bag (2023).

Reference code	DOP-OCT3 29811205A219
Size	100x100x58 cm 39x39x23"
Weight	1.27 kg 2.8 lb



SNAPBAG OCTA 5 FEET

Designed for RABBIT-EARS Frames incl. Magic Cloth Front Screen, Baffle 1/2 Grid cloth and Carry Bag (2020).

Reference code	DOP-OCT5 29811205A220
Size	155x155x63 cm 61x61x25"
Weight	2.06 kg 4.54 lb



RABBIT EARS 1XMINI SWITCH/MIX

RABBIT EARS for one MINI SWITCH or MIX.

Reference code	DOP-RE-1 / 29811205A221
Size	68x70x4 cm / 27x28x2"
Weight	1.8 kg / 3.97 lb
Colour	Aluminium



ADAPTER KIT RABBIT EARS 1XMINI

Lighting fixture Adapter for RABBIT-EARS® X-Crossover to mount one MINI MIX.

Reference code	DOP-RE-AD-1 / 29811205A222
Size	68x70x4 cm / 27x28x2"
Weight	1.85 kg / 4.08 lb
Colour	Aluminium



RABBIT EARS 2XMINI SWITCH/MIX

RABBIT EARS for two MINI SWITCH or MIX.

Reference code	DOP-RE-2 / 29811205A223
Size	68x70x4 cm / 27x28x2"
Weight	1.8 kg / 3.97 lb
Colour	Aluminium



ADAPTER KIT RABBIT EARS 2XMINI

Lighting fixture Adapter for RABBIT-EARS® X-Crossover to mount two MINI MIX.

Reference code	DOP-RE-AD-2 / 29811205A224
Size	48x21x4 cm / 19x8x2"
Weight	1.6 kg / 3.53 lb
Colour	Aluminium



INFODMG@ROSCO.COM



ROSCO.COM

DMGLUMIÈRE.COM