




COLOR FILTER TECHNICAL DATA SHEET

SWATCHBOOK: PERMACOLOR
COLOR FILTER: #3388 GASLIGHT GREEN
DESCRIPTION: Permanent Color Filter
MAX. TRANS.: 95%

COLORIMETRIC DATA

OBSERVER: CIE 1931 10 Degree
SOURCE:

- 'A' (tungsten)
- 'D65' (daylight)

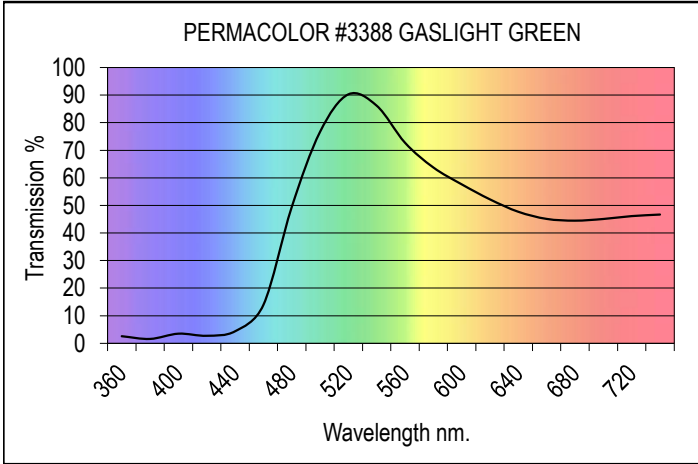


| | |
|---------------------|--------|
| HUNTER LAB SOURCE A | |
| L* | 86.62 |
| A* | -19.30 |
| B* | 45.76 |

| | |
|-----------------------|--------|
| HUNTER LAB SOURCE D65 | |
| L* | 87.51 |
| A* | -35.36 |
| B* | 57.60 |

| | |
|-----------------------|--------|
| CIE 1964 10° SOURCE A | |
| Y | 69.24 |
| (x) | 0.4595 |
| (y) | 0.4727 |

| | |
|-------------------------|--------|
| CIE 1964 10° SOURCE D65 | |
| Y | 71.06 |
| (x) | 0.3569 |
| (y) | 0.4823 |

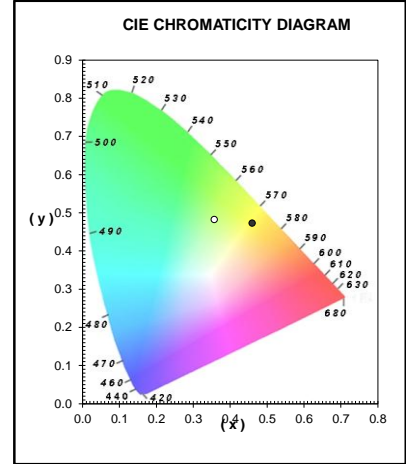

| | | | | | | | | | | | | | | | | | | | | |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| nm. | 360 | 380 | 400 | 420 | 440 | 460 | 480 | 500 | 520 | 540 | 560 | 580 | 600 | 620 | 640 | 660 | 680 | 700 | 720 | 740 |
| trans % | 3 | 2 | 3 | 3 | 4 | 14 | 49 | 77 | 90 | 86 | 73 | 64 | 58 | 52 | 48 | 45 | 44 | 45 | 46 | 47 |

MATERIAL SPECIFICATIONS:

General Description: Dichroic Coated Glass Filter
 Substrate: Borosilicate
 Thickness: 1.75mm
 3.3mm and 1.1mm also available
 Manufactured in: U.S.A

AVAILABLE SIZES:

Call
 Almost any shape/size